

Anchor Shackles

Self-Colored Stock No.	Hot Galvanized Stock No.	Nominal Shackle Size	Inside Length A	Inside Width		Diameter Pin D	Approx. Wt. Per 100 Pcs.	Rated Capacity Load Lbs.
				At Pin B	At Bow C			
—	19100	3/16*	7/8	3/8	1 1/16	1/4	6.5	667
19005	19105	1/4	1 1/8	1/2	25/32	5/16	11.5	1,000
19010	19110	5/16	1 7/32	17/32	27/32	3/8	18.4	1,500
19015	19115	3/8	1 7/16	2 1/32	1 1/32	7/16	31.5	2,000
19020	19120	7/16	1 11/16	2 3/32	1 5/32	1/2	44.6	3,000
19025	19125	1/2	1 7/8	1 3/16	1 5/16	5/8	74.5	4,000
19030	19130	5/8	2 3/8	1 1/16	1 11/16	3/4	136.4	6,500
19035	19135	3/4	2 13/16	1 1/4	2	7/8	213.5	9,500
19040***	19140	7/8	3 5/16	1 7/16	2 9/32	1	345.5	13,000
19045	19145	1	3 3/4	1 11/16	2 11/16	1 1/8	500.0	17,000
19050***	19150	1-1/8	4 1/4	1 13/16	2 29/32	1 1/4	709.0	19,000
19055***	19155	1-1/4	4 1 1/16	2 1/32	3 1/4	1 3/8	991.0	24,000
19060***	19160***	1-3/8	5 3/16	2 1/4	3 1/2	1 1/2	1328.0	27,000
19065***	19165	1-1/2	5 3/4	2 3/8	3 3/8	1 5/8	1690.0	34,000

***These products will be discontinued when stock is depleted.

NOTE: These products are manufactured to Edward W. Daniel Co. quality standards via global contracts.

Hot Galvanized Stock No.	Nominal Shackle Size	Inside Length A	Inside Width		Diameter Pin D	Approx. Wt. Per 100 Pcs.	Rated Capacity Load Lbs.
			At Pin B	At Bow C			
19405	1/4	1 1/8	1/2	25/32	5/16	11.5	1,000
19410	5/16	1 7/32	17/32	27/32	3/8	18.4	1,500
19415	3/8	1 7/16	2 1/32	1 1/32	7/16	31.5	2,000
19420	7/16	1 11/16	2 3/32	1 5/32	1/2	44.6	3,000
19425	1/2	1 7/8	1 3/16	1 5/16	5/8	74.5	4,000
19430	5/8	2 3/8	1 1/16	1 11/16	3/4	136.4	6,500
19435	3/4	2 13/16	1 1/4	2	7/8	213.5	9,500
19440	7/8	3 5/16	1 7/16	2 9/32	1	345.5	13,000
19445	1	3 3/4	1 11/16	2 11/16	1 1/8	500.0	17,000

Self-Colored Stock No.	Hot Galvanized Stock No.	Nominal Shackle Size	Inside Length A	Inside Width		Diameter Pin D	Approx. Wt. Per 100 Pcs.	Rated Capacity Load Lbs.
				At Pin B	At Bow C			
19205	19305	1/4	1 1/8	1/2	25/32	5/16	11.5	1,000
19210	19310	5/16	1 7/32	17/32	27/32	3/8	18.4	1,500
19215	19315	3/8	1 7/16	2 1/32	1 1/32	7/16	31.5	2,000
19225	19325	1/2	1 7/8	1 3/16	1 5/16	5/8	74.5	4,000
19230***	19330	5/8	2 3/8	1 1/16	1 11/16	3/4	136.4	6,500
19235***	19335	3/4	2 13/16	1 1/4	2	7/8	213.5	9,500


NOTE: These products are manufactured to Edward W. Daniel Co. quality standards via global contracts.

Hot Galvanized Stock No.	Nominal Shackle Size	Inside Length A	Inside Width		Diameter Pin D	Approx. Wt. Per 100 Pcs.	Rated Capacity Load Lbs.
			At Pin B	At Bow C			
19605	1/4	1 1/8	1/2	25/32	5/16	11.5	1,000
19610	5/16	1 7/32	17/32	27/32	3/8	18.4	1,500
19615	3/8	1 7/16	2 1/32	1 1/32	7/16	31.5	2,000
19625	1/2	1 7/8	1 3/16	1 5/16	5/8	74.5	4,000
19630	5/8	2 3/8	1 1/16	1 11/16	3/4	136.4	6,500
19635	3/4	2 13/16	1 1/4	2	7/8	213.5	9,500

- Safe Working Load permanently shown on each shackle.
- Shackles can be furnished proof tested with certificates per requirements of A.B.S. and/or I.C.G.B. Charges for proof testing and certification available on request.

Screw Pin

- Forged
- 1030 Carbon Steel
- Self-Colored/Hot Galvanized

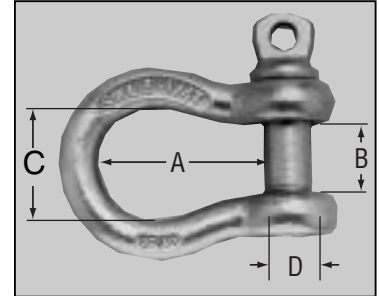

Screw pin anchor shackles meet Federal Specification RR-C-271D, Type IVA Class 2, Grade A


Screw Pin

AMERICAN MADE

- Forged
- 1030 Carbon Steel
- Hot Galvanized

Round Pin

- Forged
- 1030 Carbon Steel
- Self-Colored/Hot Galvanized

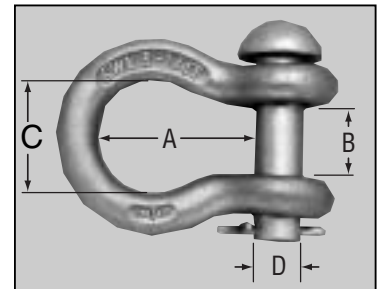

Round pin anchor shackles meet Federal Specification RR-C-271D, Type IVA Class 1, Grade A

Round Pin

AMERICAN MADE

- Forged
- 1030 Carbon Steel
- Hot Galvanized

To Place an Order or for More Information Please Call
1-800-338-2658 or visit our website at www.ewdaniel.com