


Chain Hardware

Double Clevis Links

- Forged
- Electro-Zinc Plated



Stock No.	Chain Size High Test Grade 43	Chain Size Transport Grade 70	Wt. Per 100 Pcs.	Ultimate Strength Lbs.
20700	1/4 or 5/16	1/4	33.0	13,000
20701	3/8	5/16	49.0	18,800
20705	7/16 or 1/2	3/8	105.0	28,000

Specifications


Chain Size	A	B	C	X	Y	Z
1/4 or 5/16	13/32	3/8	7/16	1 1/8	2 5/8	1 5/16
3/8	1/2	7/16	1/2	1 5/16	3 1/32	1 17/32
7/16 or 1/2	2 1/32	9/16	5/8	1 23/32	3 29/32	2

- Designed for linking all popular sizes of chain to rings, end links, eye hooks, pad eyes, tractor eyebolts, etc.
- Pin can be removed with pliers or screwdriver.
- All pins alloy steel, Quenched and Tempered.

NOTE: These products are manufactured to Edward W. Daniel Co. quality standards via global contracts.

Connecting Links

- Forged
- Zinc Plated

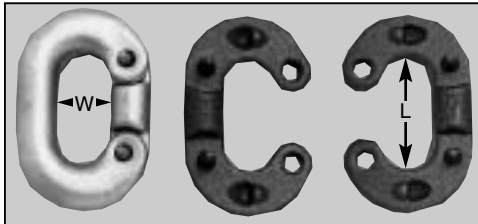

Forged steel, Quenched and Tempered.


Zinc Plated Stock No.	Size	Inside Dimensions		Approx. Wt. Per 100 Pcs.	Min. Rated Capacity
		Width W	Length L		
18800	3/16	9/32	X 17/32	3.0	650
18805	1/4	7/16	X 13/16	6.0	1,400
18810	5/16	15/32	X 29/32	10.0	2,100
18815	3/8	9/16	X 1 1/32	18.0	2,800
18820***	7/16	19/16	X 1 3/16	26.0	3,500
18825	1/2	23/32	X 1 15/32	39.0	4,150
18830	5/8	13/16	X 1 3/4	75.0	6,250
18835	3/4	1 7/64	X 2	120.0	9,000
18840***	7/8	1 1/8	X 2 15/16	170.0	12,000

NOTE: These products are manufactured to Edward W. Daniel Co. quality standards via global contracts.

***These products will be discontinued when stock is depleted.

Chain Repair Links

- Zinc Plated



Stock No.	Wire Dia.	Inside Length L	Inside Width W	Approx. Wt. Per 100 Pcs.
40700	3/16	1	1/2	3.25
40705	1/4	1 1/4	1/2	6.50
40710	5/16	1 1/2	3/4	13.25
40715	3/8	2	3/4	26.00
40720	1/2	2 1/2	1	55.00

NOTE: These products are manufactured to Edward W. Daniel Co. quality standards via global contracts.

Cold Shuts

- Forged
- Self-Colored



Stock No.	Size of Chain	Wt. Per 100 Pcs.	Rated Capacity
Tumble Bright Finish			
19500	3/16	2.5	750
19505	1/4	5.5	1,250
19510	5/16	10.0	1,900
19515	3/8	16.5	2,650
19520	7/16	25.0	3,500
19525	1/2	37.0	4,500
19530	5/8	79.0	6,900
19535	3/4	132.5	9,750

NOTE: These products are manufactured to Edward W. Daniel Co. quality standards via global contracts.